

SERIES
MAXIMA 30 - 160 kW

ROTARY VANE COMPRESSORS



MAXIMA
MAXIMA R
MAXIMA W
MAXIMA PLUS
MAXIMA R PLUS
MAXIMA W PLUS



SERIES MAXIMA

About us



Ing. **Enea Mattei SpA** is an Italian company that has been producing air compressors since 1919. Over the years, the company has continually evolved and is today one of the world's foremost companies in the compressed air sector and the leader in the production of rotary vane compressors.

Behind the success of Mattei are the choices the company has made in terms of design, production and marketing, driven by the results of its continual and in-depth research and development programmes.

During these years of continual change, Mattei has been able to adapt to the requirements of the market and through the results of its research has created products that are always innovative and technologically advanced.



Certified quality

Quality as an integral part of all company functions and constant improvement of all production processes so as to always guarantee the maximum level of reliability and satisfaction.

This, in brief, is the value and the meaning of **Mattei's** operational philosophy. A way of approaching the market and customers that makes **Mattei** an absolute point of reference in the compressed air sector.

Since 1994, **Mattei** has been operating with a Quality System certified by the DNV Institute under UNI EN ISO 9001 regulations.



Compressors MAXIMA series

One of the primary aims of competing in the global economy is to minimise production costs. Industry leaders expect maximum value and profitable returns when investing in new machinery that will improve their manufacturing process and lower their costs. As compressed air production tends to be the single largest consumer of electricity in a given manufacturing plant, saving energy and reducing maintenance costs offers real opportunities to improve profitability and thus, enhance the competitive advantage for the company. Designed to save energy and protect the environment, the MAXIMA rotary vane air compressor range has been engineered by Mattei to meet the requirements of manufacturers that use large, constant volumes of compressed air for long periods of time. Maxima is best suited for high air demand applications where the production of compressed air has a virtually constant base load throughout the day. The name of this compressor was selected to evoke the essence of the incredible performance of this machine.

SOFT - START

Motor soft starter allows a reduction of the load and torque in the power train and electrical current surge of the motor during start-up. This reduces the mechanical stress on the motor and shaft, as well as the electrodynamic stresses on the attached power cables and electrical distribution network, extending the lifespan of the system.

Efficiency


All MAXIMA's compressors have a 1:1 ratio between the electric motor speed and that of the airend. This means greater energy efficiency and higher performances. The low rotational speed of the compressor unit found only in vane technology, the high volumetric efficiency and the complete absence of roller or thrust bearings, result in energy savings of over 15% compared to other rotary compressors.

Simple and economic maintenance*

Maintenance operations only include changing the oil at predetermined intervals, cleaning or replacing the air filter and cleaning the radiator. The separator filters are substituted every 10,000 working hours, with significant savings. The absence of roller bearings helps to reduce significantly the cost for maintenance.

OTHER COMPRESSORS MAINTENANCE

MATTEI'S COMPRESSORS MAINTENANCE

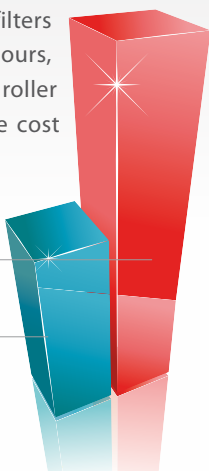

*with Mattei Rotoroil

Maxima lives up to its name by delivering maximum performance from every kW of input energy. Mattei's ethos of continuous investment in research and development of its rotary vane technology has led to the excellent specific energy efficiency of the Maxima range. Large hinged doors and easily removable panels allow complete and easy accessibility for all maintenance and intervention operations. The compressor requires no special foundations and its base has suitable lifting points for ease of installation.



Energy saving

The MAXIMA range is equipped with high efficiency electric motors. The electric motor is directly coupled to the airend, allowing great advantages in overall efficiency of the compressed air unit, meaning less kW per m³/min.

Direct coupling

The electric motor and the compressor are coupled directly by means of flexible coupling and turn at only 1000 rpm. Direct coupling determines a remarkable "energy saving" because there are no energy losses caused by gears or V belts.

Energy recovery

Mattei offers for its compressors a heat recovery system that allows water to be heated for industrial process or sanitary use. The "Heat Recovery" kit is totally integrated into the oil cooling circuit, making the unit independent from the oil temperature control and protected from any possible malfunctions, such as water flow reduction and overheating.

Blades designed for over 100,000 hours live*

An oil film on the stator's inside surface prevents the moving parts from wearing out by avoiding a direct contact with the blades.

SERIES MAXIMA

Always caring about our customers' requirements

Worldwide consultancy and assistance

Mattei operates worldwide with its sales and assistance network, providing a wide service range.

By purchasing a Mattei compressor you can rely on a qualified after-sales service, able to answer any request for assistance in very short time scales.



3D quality control

The quality check of manufacturing tolerances occurs constantly via three dimensional measurement machines.

This ensures the compliance of our products with the highest quality standards.

Comprehensive tests

Before leaving our factory any Mattei compressor has already undergone various extensive and in-depth testing procedures, during which it has been checked and tested in different operating conditions. All the electric, mechanical and performance information are recorded via a wireless data detection system.

High technology manufacturing machinery

The manufacturing of compression units and blades is made through modern robotic machining centres. The parts assembly is carried out by specialised staff and in accordance with strictly controlled operating procedures, specified by Mattei's quality management.

Mattei original spare parts and lubricants

Mattei Original Spare Parts and Mattei Rotoroil lubricants are made to very high design standards and conform to precise technical specifications. Only Mattei original spare parts allow you to be sure of maintaining over time the same levels of performance, reliability and safety of your Mattei product.

- Mattei Original Spare Parts are indispensable for the efficiency of your compressed air equipment;
- Parts are always available in stock;
- Quality tested and conforming to manufacturer specifications;
- Suitable for Mattei's recommended maintenance intervals.







Operating principle

Maximum efficiency of the air compression process, excellent reliability and low running costs; are just some of the key benefits that rotary vane technology can offer. The vane compressor is a volumetric rotary compressor that consists of a stator cylinder in which a rotor is mounted off-centre but parallel to its sides. The rotor has slots in which the vanes are free to slide: centrifugal force keeps them in contact with the sides of the stator during rotation. The rotary vane compressor, thanks to its **simple construction**, offers remarkable advantages, first among them being **greater volume yield** because the vanes are in constant contact with the inner wall of the stator and form a perfectly airtight seal with no leaks along the wall thanks to a continuous film of oil. In this type of compressor no axial thrust is generated so the side surfaces of the rotor are not subject to wear and thus no rotating bearings or thrust bearings are needed. The vanes, too, because of the special way they are made have practically **unlimited life**. Behind the success of Mattei compressors there is thus **extreme reliability, long life, quiet operation and simplicity of maintenance**.

Design is important too: compactness and clean lines, together with harmonious shapes, give Mattei compressors an image of robustness and ease of use.

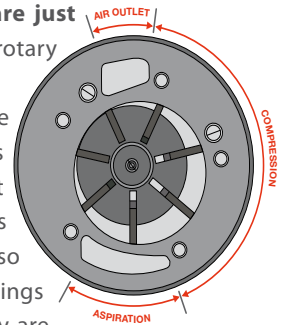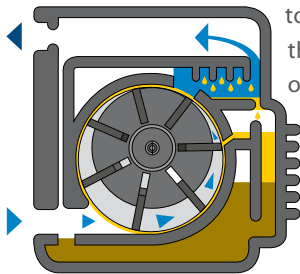

PLUS Version

Dryer with ecological gas

The plus version includes the integrated installation of a direct expansion refrigeration dryer, which is air cooled and filled with environmentally friendly gas. The combination of a Mattei rotary vane air compressor with an integrated dryer and where applicable mounted on an air receiver is the ideal solution for a complete and compact system.

- ▶ Efficient refrigerating power partialization
- ▶ Constant dewpoint
- ▶ MAESTRO^{XS} control
- ▶ High efficiency

MAESTRO^{XS}

To have everything under control

The Maxima series is equipped with the exclusive state-of-the-art computerised controller, Maestroxs.








This system automatically controls, monitors and programmes the operation of the compressor, and can be connected to a PC for remote control.

If connected to other compressed air packages equipped with Maestroxs, the unit can become master of a compressed air plant, thus saving on the installation of an additional controller. Maestro^{XS} can be interfaced via web or cellular technology to provide remote service monitoring.










Technical data

400V/50 Hz/3

| |  Model |  Max. working pressure | |  F.A.D. | |  Sound pressure level |  Power | |  Dimensions LxWxH | | | | | |  Weight | |
|-------------|--|--|------|---|------|---|--|-----|---|-----|------|-----|------|-----|---|------|
| | | bar | psig | m³/min | scfm | | kW | hp | mm | ins | mm | ins | mm | ins | kg | lbs |
| MAXIMA | MAXIMA 30 | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 920 | 2024 |
| | MAXIMA 110 | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2840 | 6248 |
| | MAXIMA 160 | 8 | 115 | 31,14 | 1100 | < 73 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4150 | 9130 |
| | MAXIMA 30 R | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 940 | 2068 |
| | MAXIMA 110 R | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2920 | 6424 |
| | MAXIMA 160 R | 8 | 115 | 31,14 | 1100 | < 73 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4350 | 9570 |
| | MAXIMA 30 W | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 940 | 2068 |
| | MAXIMA 110 W | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2920 | 6424 |
| | MAXIMA 160 W | 8 | 115 | 31,14 | 1100 | < 73 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4150 | 9130 |
| MAXIMA PLUS | MAXIMA 30 PLUS | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1015 | 2233 |
| | MAXIMA 110 PLUS | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3310 | 7282 |
| | MAXIMA 30 R PLUS | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1040 | 2288 |
| | MAXIMA 110 R PLUS | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3390 | 7458 |
| | MAXIMA 30 W PLUS | 8 | 115 | 6,45 | 228 | 65 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1040 | 2288 |
| | MAXIMA 110 W PLUS | 8 | 115 | 23,35 | 825 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3390 | 7458 |

460V/60 Hz/3

| |  Model |  Max. working pressure | |  F.A.D. | |  Sound pressure level db(A) |  Power | |  Dimensions LxWxH | | | | | |  Weight | |
|-------------|--|--|------|---|------|--|--|-----|---|-----|------|-----|------|-----|---|------|
| | | bar | psig | m ³ /min | scfm | | kW | hp | mm | ins | mm | ins | mm | ins | kg | lbs |
| MAXIMA | MAXIMA 30 | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 920 | 2024 |
| | MAXIMA 110 | 8 | 115 | 24 | 847 | < 72 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2840 | 6248 |
| | MAXIMA 160 | 8 | 115 | 34 | 1201 | < 75 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4150 | 9130 |
| | MAXIMA 30 R | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 940 | 2068 |
| | MAXIMA 110 R | 8 | 115 | 24 | 847 | < 72 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2920 | 6424 |
| | MAXIMA 160 R | 8 | 115 | 34 | 1201 | < 75 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4350 | 9570 |
| | MAXIMA 30 W | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 940 | 2068 |
| | MAXIMA 110 W | 8 | 115 | 24 | 847 | < 72 | 110 | 150 | 2350 | 93 | 1485 | 59 | 1980 | 78 | 2920 | 6424 |
| MAXIMA PLUS | MAXIMA 160 W | 8 | 115 | 34 | 1201 | < 75 | 160 | 200 | 2670 | 105 | 1780 | 70 | 2235 | 88 | 4150 | 9130 |
| | MAXIMA 30 PLUS | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1015 | 2233 |
| | MAXIMA 110 PLUS | 8 | 115 | 23,4 | 826 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3310 | 7282 |
| | MAXIMA 30 R PLUS | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1040 | 2288 |
| | MAXIMA 110 R PLUS | 8 | 115 | 23,4 | 826 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3390 | 7458 |
| | MAXIMA 30 W PLUS | 8 | 115 | 6,87 | 243 | 67 | 30 | 40 | 1830 | 72 | 960 | 38 | 1670 | 66 | 1040 | 2288 |
| | MAXIMA 110 W PLUS | 8 | 115 | 23,4 | 826 | < 70 | 110 | 150 | 2950 | 116 | 1485 | 59 | 1980 | 78 | 3390 | 7458 |

Energy recovery system version (R)

Water-cooled version (W)

F.A.D. in accordance with ISO 1217, annex "C"

Sound pressure level according to ISO 2151, tolerance: ± 3 dB(A)

Working pressure: 7.5 bar



ITALY - ING. ENEA MATTEI SpA

Strada Padana Superiore, 307

20055 VIMODRONE (MI)

Tel + 39 02253051 - Fax +39 0225305243

E-mail: info@matteigroup.com

www.matteigroup.com



UNI EN ISO 9001:2015

REV.1